



Déco N203 Blockout - white | pearl grey-white (020702)

Technical info

FRONT

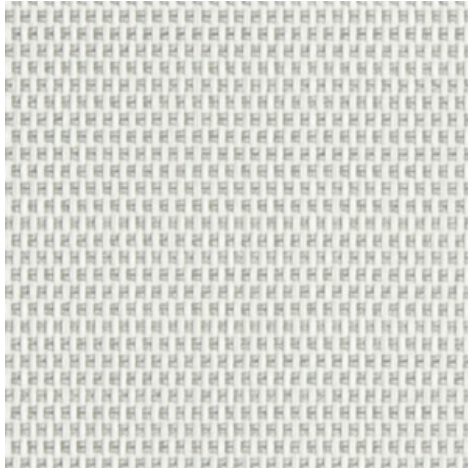

BACK

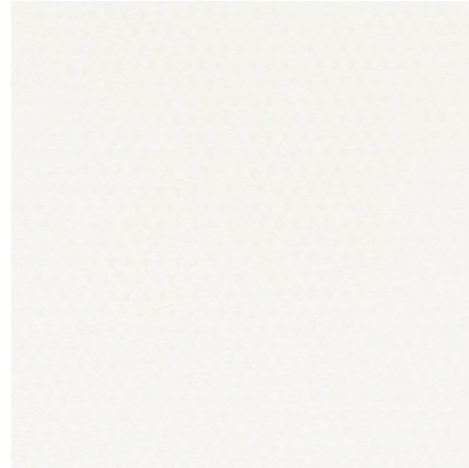

Widths		240 cm
Composition		Déco N203 flock laminated
Openness factor	NBN EN 410	0.00%
Weight	NF EN 12127	700.00 g/m ²
Thickness	ISO 5084	0.65 mm
Density	ISO 7211/2	WARP 22.00 yarn/cm WEFT 20.00 yarn/cm
Color fastness to artificial light	ISO 105 B02	>7
Roll length		30 m
Cleaning		With soapy water
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3, d0
└ France	NF P92-503	M1
└ Italy	UNI 9177	Class 1
└ Germany	DIN 4102	B1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Déco N203 Blockout - white | pearl grey-white (020702)

Technical info

Tear strength	ISO 4674-1 methode 2		
↳ Original		WARP 2.90 daN	WEFT 3.10 daN
↳ After climatic chamber -30°C		WARP 2.40 daN	WEFT 2.90 daN
↳ After climatic chamber +70°C		WARP 2.70 daN	WEFT 3.40 daN
Elongation up to break	ISO 1421		
↳ Original		WARP 7.20 %	WEFT 3.50 %
↳ After color fastness to artificial light		WARP 6.10 %	WEFT 2.90 %
↳ After climatic chamber -30°C		WARP 6.30 %	WEFT 2.80 %
↳ After climatic chamber +70°C		WARP 5.10 %	WEFT 1.40 %
Breaking strength	ISO 1421		
↳ Original		WARP 185.00 daN/5cm	WEFT 200.00 daN/5cm
↳ After color fastness to artificial light		WARP 170.00 daN/5cm	WEFT 200.00 daN/5cm
↳ After climatic chamber -30°C		WARP 125.00 daN/5cm	WEFT 160.00 daN/5cm
↳ After climatic chamber +70°C		WARP 110.00 daN/5cm	WEFT 90.00 daN/5cm

Front - Interior

 Déco N203 Blockout - white | pearl grey-white
 (020702)

Visual properties

Tv = Visual light transmittance	0.00%
Tuv = UV transmittance	0.00%

Solar energetic properties

As = Solar absorptance	59.00%
Rs = Solar reflectance	41.00%
Ts = Solar transmittance	0.00%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.41	0.00	0.41	0.48
Glazing B	0.43	0.00	0.43	0.57
Glazing C	0.40	0.00	0.40	0.68
Glazing D	0.26	0.00	0.26	0.82

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 4	Very good effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 2	Moderate effect
Daylight utilisation	Class 0	Very little effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

 Déco N203 Blockout - white | pearl grey-white
 (020702)

Visual properties	
Tv = Visual light transmittance	0.00%
Tuv = UV transmittance	0.00%

Solar energetic properties	
As = Solar absorptance	33.00%
Rs = Solar reflectance	67.00%
Ts = Solar transmittance	0.00%

Fabric + glazing: G-factor				
	G	Te	Qi	SC
Glazing A	0.32	0.00	0.32	0.38
Glazing B	0.35	0.00	0.35	0.47
Glazing C	0.35	0.00	0.35	0.60
Glazing D	0.25	0.00	0.25	0.78

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort		
Normal solar transmittance	Class 4	Very good effect
Glare control	Class 4	Very good effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 2	Moderate effect
Daylight utilisation	Class 0	Very little effect

Thermal comfort G-factor = Total solar energy transmittance			
Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor			
Glazing A	Glazing B	Glazing C	Glazing D
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect