


Déco N203 (end 31.12.2024) - white | white-charcoal (002049)

Technical info

FRONT



BACK

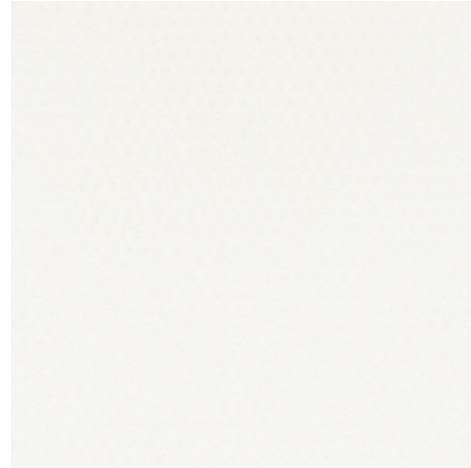

Widths		250 cm
Composition		Fibreglass 36% - PVC 64%
Openness factor	NBN EN 410	3.00%
Weight	NF EN 12127	435.00 g/m ²
Thickness	ISO 5084	0.45 mm
Density	ISO 7211/2	WARP 22.00 yarn/cm WEFT 20.00 yarn/cm
Color fastness to artificial light	ISO 105 B02	>7
Roll length		30 m
Cleaning		With soapy water
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3,d0
└ France	NF P92-503	M2
└ Italy	UNI 9177	Class 1
└ Germany	DIN 4102	B2
└ UK	BS 5867	C
└ USA	NFPA 701	FR
└ Spain	UNE 13773	Clase 1

Déco N203 (end 31.12.2024) - white | white-charcoal (002049)

Technical info

Tear strength ISO 4674-1 methode 2			
└ Original		WARP 3.30 daN	WEFT 3.65 daN
└ After climatic chamber -30°C		WARP 3.00 daN	WEFT 3.80 daN
└ After climatic chamber +70°C		WARP 3.10 daN	WEFT 3.60 daN
Elongation up to break ISO 1421			
└ Original		WARP 8.80 %	WEFT 2.80 %
└ After color fastness to artificial light		WARP 8.70 %	WEFT 2.70 %
└ After climatic chamber -30°C		WARP 8.60 %	WEFT 1.80 %
└ After climatic chamber +70°C		WARP 8.90 %	WEFT 1.90 %
Breaking strength ISO 1421			
└ Original		WARP 125.00 daN/5cm	WEFT 175.00 daN/5cm
└ After color fastness to artificial light		WARP 120.00 daN/5cm	WEFT 185.00 daN/5cm
└ After climatic chamber -30°C		WARP 120.00 daN/5cm	WEFT 140.00 daN/5cm
└ After climatic chamber +70°C		WARP 130.00 daN/5cm	WEFT 125.00 daN/5cm

Front - Interior

Déco N203 (end 31.12.2024) - white | white-charcoal (002049)

Visual properties

Tv = Visual light transmittance	13.20%
Tuv = UV transmittance	5.60%

Solar energetic properties

As = Solar absorptance	36.90%
Rs = Solar reflectance	48.70%
Ts = Solar transmittance	14.40%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.45	0.12	0.32	0.53
Glazing B	0.45	0.11	0.35	0.60
Glazing C	0.41	0.08	0.33	0.70
Glazing D	0.27	0.05	0.22	0.83

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 3	Good effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Déco N203 (end 31.12.2024) - white | white-charcoal (002049)

Visual properties

Tv = Visual light transmittance	13.20%
Tuv = UV transmittance	5.60%

Solar energetic properties

As = Solar absorptance	36.90%
Rs = Solar reflectance	48.70%
Ts = Solar transmittance	14.40%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.45	0.12	0.32	0.53
Glazing B	0.45	0.11	0.35	0.60
Glazing C	0.41	0.08	0.33	0.70
Glazing D	0.27	0.05	0.22	0.83

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 3	Good effect
Glare control	Class 0	Very little effect
Privacy night	Class 1	Little effect
Visual contact with the outside	Class 3	Good effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect