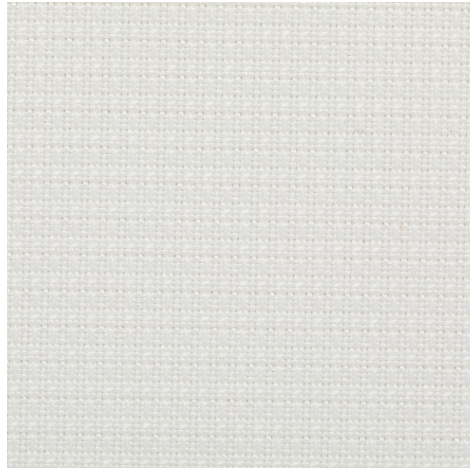
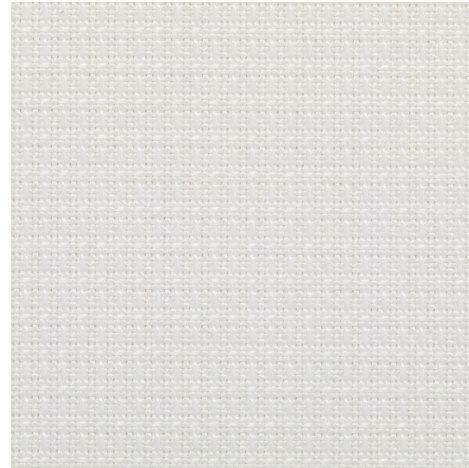


Ulterio 1% - white (002002)

Technical info

FRONT

BACK


Widths		250 cm
Composition		100% Recycled PET bottles
Openness factor	NBN EN 410	1.00%
Weight	NF EN 12127	243.00 g/m ²
Roll length		30 m
Cleaning		With soapy water
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3, d0
└ France	NF P92-503	M1
└ Italy	UNI 9177	Class 1
└ Germany	DIN 4102	B1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Front - Interior

Ulterio 1% - white (002002)

Visual properties

Tv = Visual light transmittance	30.20%
Tuv = UV transmittance	28.20%

Solar energetic properties

As = Solar absorptance	5.90%
Rs = Solar reflectance	62.60%
Ts = Solar transmittance	31.50%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.39	0.28	0.11	0.46
Glazing B	0.39	0.24	0.16	0.52
Glazing C	0.37	0.19	0.19	0.63
Glazing D	0.25	0.11	0.14	0.80

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 3	Good effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Ulterio 1% - white (002002)

Visual properties	
Tv = Visual light transmittance	30.20%
Tuv = UV transmittance	28.20%

Solar energetic properties	
As = Solar absorptance	5.90%
Rs = Solar reflectance	62.60%
Ts = Solar transmittance	31.50%

Fabric + glazing: G-factor				
	G	Te	Qi	SC
Glazing A	0.39	0.28	0.11	0.46
Glazing B	0.39	0.24	0.16	0.52
Glazing C	0.37	0.19	0.19	0.63
Glazing D	0.25	0.11	0.14	0.80

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort		
Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 3	Good effect

Thermal comfort G-factor = Total solar energy transmittance			
Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor			
Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect