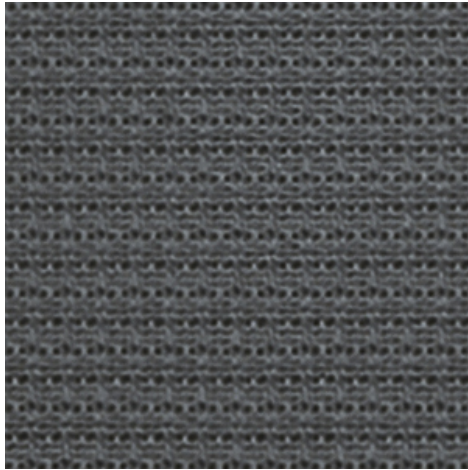
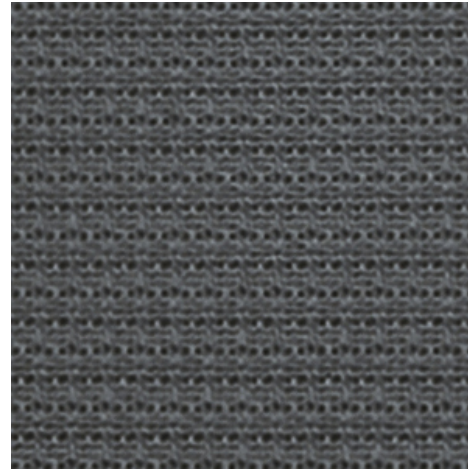


**Ulterio 3% - plum slate (087087)**
**Technical info**
**FRONT**

**BACK**


<b>Widths</b>		250 cm   320 cm
<b>Composition</b>		100% Recycled PET bottles
<b>Openness factor</b>	NBN EN 410	3.00%
<b>Weight</b>	NF EN 12127	223.00 g/m <sup>2</sup>
<b>Thickness</b>	ISO 5084	0.53 mm
<b>Density</b>	ISO 7211/2	WARP 21.00 yarn/cm      WEFT 18.00 yarn/cm
<b>Color fastness to artificial light</b>	ISO 105 B02	> 7
<b>Roll length</b>		30 m
<b>Cleaning</b>		With soapy water
<b>Confection</b>		By heat, high frequency or ultrasonic welding
<b>Fire classification</b>		
└ Europe	UNE-EN 13501-1:2007	C-s3, d0
└ France	NF P92-503	M1
└ Italy	UNI 9177	Class 1
└ Germany	DIN 4102	B1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Ulterio 3% - plum slate (087087)		Technical info	
<b>Tear strength</b>	ISO 4674-1 methode 2		
└ Original		WARP 5.20 daN	WEFT 6.80 daN
└ After climatic chamber -30°C		WARP 5.00 daN	WEFT 6.20 daN
└ After climatic chamber +70°C		WARP 5.20 daN	WEFT 6.70 daN
<b>Elongation up to break</b>	ISO 1421		
└ Original		WARP 36.00 %	WEFT 33.50 %
<b>Breaking strength</b>	ISO 1421		
└ Original		WARP 160.00 daN/5cm	WEFT 135.00 daN/5cm

**Front - Interior**

Ulterio 3% - plum slate (087087)

Visual properties	
<b>Tv = Visual light transmittance</b>	4.40%
<b>Tuv = UV transmittance</b>	4.50%

Solar energetic properties	
<b>As = Solar absorptance</b>	50.50%
<b>Rs = Solar reflectance</b>	31.90%
<b>Ts = Solar transmittance</b>	17.60%

Fabric + glazing: G-factor				
	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.55	0.15	0.40	0.65
<b>Glazing B</b>	0.54	0.13	0.41	0.71
<b>Glazing C</b>	0.47	0.09	0.37	0.79
<b>Glazing D</b>	0.28	0.05	0.23	0.88

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort		
<b>Normal solar transmittance</b>	Class 4	Very good effect
<b>Glare control</b>	Class 3	Good effect
<b>Privacy night</b>	Class 2	Moderate effect
<b>Visual contact with the outside</b>	Class 2	Moderate effect
<b>Daylight utilisation</b>	Class 1	Little effect

Thermal comfort G-factor = Total solar energy transmittance			
<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 0	Class 0	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor			
<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

**Back - Interior**

Ulterio 3% - plum slate (087087)

**Visual properties**

<b>Tv = Visual light transmittance</b>	4.40%
<b>Tuv = UV transmittance</b>	4.50%

**Solar energetic properties**

<b>As = Solar absorptance</b>	50.50%
<b>Rs = Solar reflectance</b>	31.90%
<b>Ts = Solar transmittance</b>	17.60%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.55	0.15	0.40	0.65
<b>Glazing B</b>	0.54	0.13	0.41	0.71
<b>Glazing C</b>	0.47	0.09	0.37	0.79
<b>Glazing D</b>	0.28	0.05	0.23	0.88

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 4	Very good effect
<b>Glare control</b>	Class 3	Good effect
<b>Privacy night</b>	Class 2	Moderate effect
<b>Visual contact with the outside</b>	Class 2	Moderate effect
<b>Daylight utilisation</b>	Class 1	Little effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 0	Class 0	Class 1	Class 2

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 0	Class 0	Class 0	Class 1

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect