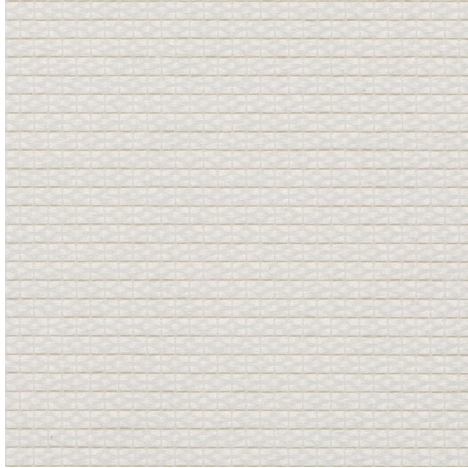
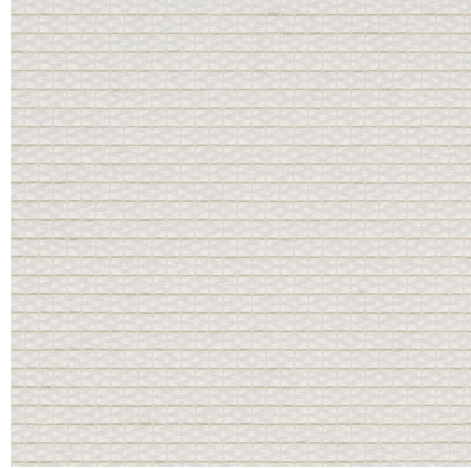


FRONT

BACK


| | | |
|---|---------------------|--|
| Widths | | 280 cm |
| Composition | | Polyester 100% |
| Openness factor | NBN EN 14500-B1 | 6.00% |
| Weight | NF EN 12127 | 160.00 g/m ² |
| Thickness | ISO 2286-3 | 0.35 mm |
| Density | ISO 7211/ | WARP 33.00 yarn/cm WEFT 24.00 yarn/cm |
| Color fastness to artificial light | ISO 105 B02 | >6 |
| Roll length | | 40 m |
| Cleaning | | Mit Seifenwasser |
| Fire classification | | |
| └ Europe | UNE-EN 13501-1:2007 | C-s3, d0 |
| └ France | NF P92-503 | M2 |
| └ Germany | DIN 4102 | B1 |
| └ Spain | UNE EN 13773-2003 | Clase 1 |

| Office 180 - weiß weiß (002002) | | Technical info | |
|-----------------------------------|-------------|--------------------|--------------------|
| Tear strength | ISO 4674-1B | | |
| └ Original | | WARP 2.00 daN | WEFT 0.90 daN |
| └ After climatic chamber -30°C | | WARP 1.70 daN | WEFT 0.90 daN |
| Elongation up to break | ISO 1421 | | |
| └ Original | | WARP 16.80 % | WEFT 14.40 % |
| └ After climatic chamber -30°C | | WARP 18.40 % | WEFT 14.30 % |
| └ After climatic chamber +70°C | | WARP 19.30 % | WEFT 14.60 % |
| Breaking strength | ISO 1421 | | |
| └ Original | | WARP 19.70 daN/5cm | WEFT 87.50 daN/5cm |
| └ After climatic chamber -30°C | | WARP 21.80 daN/5cm | WEFT 89.40 daN/5cm |
| └ After climatic chamber +70°C | | WARP 1.80 daN/5cm | WEFT 0.80 daN/5cm |
| └ After climatic chamber +70°C | | WARP 23.30 daN/5cm | WEFT 86.40 daN/5cm |

Front - Interior

Office 180 - weiß | weiß (002002)

Visual properties

| | |
|--|--------|
| Tv = Visual light transmittance | 35.40% |
| Tuv = UV transmittance | 32.30% |

Solar energetic properties

| | |
|---------------------------------|--------|
| As = Solar absorptance | 3.10% |
| Rs = Solar reflectance | 59.90% |
| Ts = Solar transmittance | 37.00% |

Fabric + glazing: G-factor

| | G | Te | Qi | SC |
|------------------|----------|-----------|-----------|-----------|
| Glazing A | 0.41 | 0.32 | 0.09 | 0.48 |
| Glazing B | 0.41 | 0.28 | 0.13 | 0.54 |
| Glazing C | 0.38 | 0.22 | 0.16 | 0.65 |
| Glazing D | 0.26 | 0.13 | 0.13 | 0.81 |

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

| | | |
|--|---------|--------------------|
| Normal solar transmittance | Class 3 | Good effect |
| Glare control | Class 0 | Very little effect |
| Privacy night | Class 1 | Little effect |
| Visual contact with the outside | Class 1 | Little effect |
| Daylight utilisation | Class 3 | Good effect |

Thermal comfort G-factor = Total solar energy transmittance

| Glazing A | Glazing B | Glazing C | Glazing D |
|------------------|------------------|------------------|------------------|
| Class 1 | Class 1 | Class 1 | Class 2 |

Thermal comfort Qi-factor = Secondary heat transfer factor

| Glazing A | Glazing B | Glazing C | Glazing D |
|------------------|------------------|------------------|------------------|
| Class 3 | Class 2 | Class 2 | Class 2 |

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Office 180 - weiß | weiß (002002)

Visual properties

| | |
|--|--------|
| Tv = Visual light transmittance | 35.40% |
| Tuv = UV transmittance | 32.30% |

Solar energetic properties

| | |
|---------------------------------|--------|
| As = Solar absorptance | 2.90% |
| Rs = Solar reflectance | 60.10% |
| Ts = Solar transmittance | 37.00% |

Fabric + glazing: G-factor

| | G | Te | Qi | SC |
|------------------|----------|-----------|-----------|-----------|
| Glazing A | 0.41 | 0.32 | 0.09 | 0.48 |
| Glazing B | 0.41 | 0.28 | 0.13 | 0.54 |
| Glazing C | 0.38 | 0.22 | 0.16 | 0.65 |
| Glazing D | 0.26 | 0.13 | 0.13 | 0.81 |

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

| | | |
|--|---------|--------------------|
| Normal solar transmittance | Class 3 | Good effect |
| Glare control | Class 0 | Very little effect |
| Privacy night | Class 1 | Little effect |
| Visual contact with the outside | Class 1 | Little effect |
| Daylight utilisation | Class 3 | Good effect |

Thermal comfort G-factor = Total solar energy transmittance

| Glazing A | Glazing B | Glazing C | Glazing D |
|------------------|------------------|------------------|------------------|
| Class 1 | Class 1 | Class 1 | Class 2 |

Thermal comfort Qi-factor = Secondary heat transfer factor

| Glazing A | Glazing B | Glazing C | Glazing D |
|------------------|------------------|------------------|------------------|
| Class 3 | Class 2 | Class 2 | Class 2 |

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect