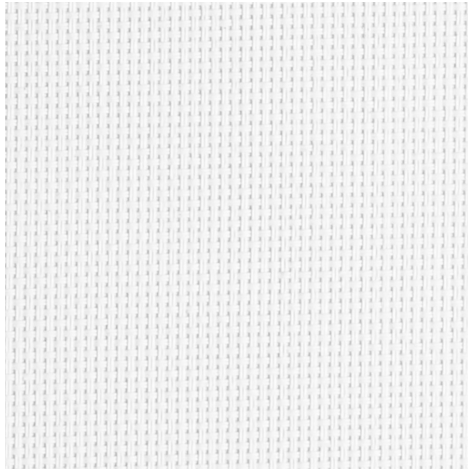
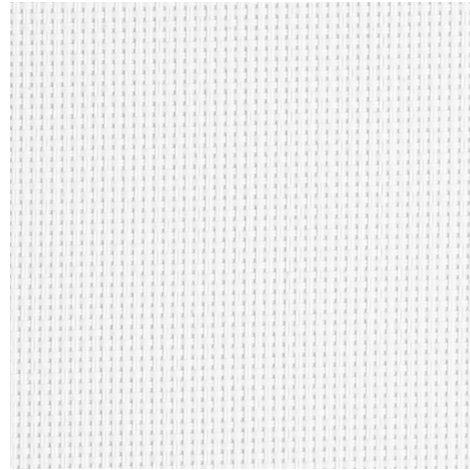


**Natté 300 - WOW white (092092)**
**Technical info**
**FRONT**

**BACK**


<b>Widths</b>		250 cm
<b>Composition</b>		Fibreglass 36% - PVC 64%
<b>Openness factor</b>	NBN EN 410	10.00%
<b>Weight</b>	NF EN 12127	330.00 g/m <sup>2</sup>
<b>Thickness</b>	ISO 5084	0.30 mm
<b>Density</b>	ISO 7211/2	WARP 18.00 yarn/cm      WEFT 18.00 yarn/cm
<b>Color fastness to artificial light</b>	ISO 105 B02	>7
<b>Roll length</b>		30 m
<b>Cleaning</b>		With soapy water
<b>Confection</b>		By heat, high frequency or ultrasonic welding
<b>Fire classification</b>		
└ Europe	UNE-EN 13501-1:2007	C-s3,d0
└ France	NF P92-503	M2
└ Italy	UNI 9177	Class 1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Natté 300 - WOW white (092092)		Technical info	
<b>Tear strength</b>	ISO 4674-1 methode 2		
↳ Original		WARP 4.70 daN	WEFT 4.90 daN
↳ After climatic chamber -30°C		WARP 4.80 daN	WEFT 4.90 daN
↳ After climatic chamber +70°C		WARP 4.80 daN	WEFT 4.90 daN
<b>Elongation up to break</b>	ISO 1421		
↳ Original		WARP 2.70 %	WEFT 2.70 %
↳ After color fastness to artificial light		WARP 3.10 %	WEFT 3.20 %
↳ After climatic chamber -30°C		WARP 3.10 %	WEFT 2.70 %
↳ After climatic chamber +70°C		WARP 2.70 %	WEFT 2.70 %
<b>Breaking strength</b>	ISO 1421		
↳ Original		WARP 140.00 daN/5cm	WEFT 140.00 daN/5cm
↳ After color fastness to artificial light		WARP 140.00 daN/5cm	WEFT 140.00 daN/5cm
↳ After climatic chamber -30°C		WARP 135.00 daN/5cm	WEFT 130.00 daN/5cm
↳ After climatic chamber +70°C		WARP 100.00 daN/5cm	WEFT 120.00 daN/5cm