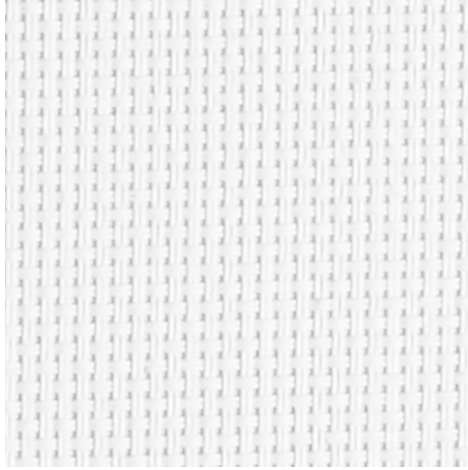
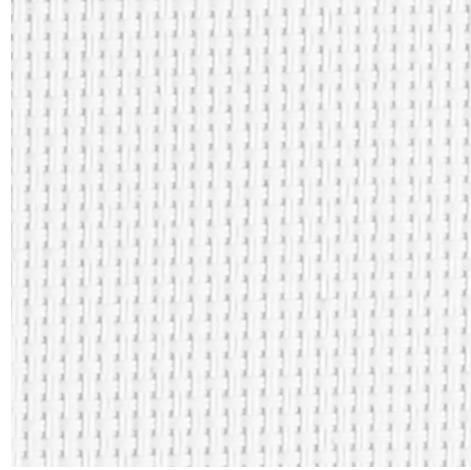


**Natté 380 - WOW white (092092)**
**Technical info**
**FRONT**

**BACK**


<b>Widths</b>		250 cm
<b>Composition</b>		Fibreglass 36% - PVC 64%
<b>Openness factor</b>	NBN EN 410	5.00%
<b>Weight</b>	NF EN 12127	385.00 g/m <sup>2</sup>
<b>Thickness</b>	ISO 5084	0.35 mm
<b>Density</b>	ISO 7211/2	WARP 20.00 yarn/cm      WEFT 20.00 yarn/cm
<b>Color fastness to artificial light</b>	ISO 105 B02	>7
<b>Roll length</b>		30 m
<b>Cleaning</b>		With soapy water
<b>Confection</b>		By heat, high frequency or ultrasonic welding
<b>Fire classification</b>		
└ Europe	UNE-EN 13501-1:2007	C-s3,d0
└ France	NF P92-503	M2
└ Italy	UNI 9177	Class 1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

<b>Natté 380 - WOW white (092092)</b>		<b>Technical info</b>	
<b>Tear strength</b>	ISO 4674-1 methode 2		
↳ Original		WARP 4.90 daN	WEFT 4.70 daN
↳ After climatic chamber -30°C		WARP 5.10 daN	WEFT 5.15 daN
↳ After climatic chamber +70°C		WARP 5.30 daN	WEFT 4.80 daN
<b>Elongation up to break</b>	ISO 1421		
↳ Original		WARP 3.70 %	WEFT 3.20 %
↳ After color fastness to artificial light		WARP 3.70 %	WEFT 3.00 %
↳ After climatic chamber -30°C		WARP 4.00 %	WEFT 3.00 %
↳ After climatic chamber +70°C		WARP 3.60 %	WEFT 2.90 %
<b>Breaking strength</b>	ISO 1421		
↳ Original		WARP 160.00 daN/5cm	WEFT 160.00 daN/5cm
↳ After color fastness to artificial light		WARP 150.00 daN/5cm	WEFT 160.00 daN/5cm
↳ After climatic chamber -30°C		WARP 150.00 daN/5cm	WEFT 140.00 daN/5cm
↳ After climatic chamber +70°C		WARP 120.00 daN/5cm	WEFT 120.00 daN/5cm

**Front - Interior**

Natté 380 - WOW white (092092)

**Visual properties**

<b>Tv = Visual light transmittance</b>	26.30%
<b>Tuv = UV transmittance</b>	17.50%

**Solar energetic properties**

<b>As = Solar absorptance</b>	7.90%
<b>Rs = Solar reflectance</b>	63.60%
<b>Ts = Solar transmittance</b>	28.50%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.37	0.25	0.12	0.44
<b>Glazing B</b>	0.38	0.22	0.17	0.51
<b>Glazing C</b>	0.37	0.17	0.20	0.62
<b>Glazing D</b>	0.25	0.10	0.15	0.79

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 3	Good effect
<b>Glare control</b>	Class 0	Very little effect
<b>Privacy night</b>	Class 1	Little effect
<b>Visual contact with the outside</b>	Class 1	Little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 1	Class 1	Class 1	Class 2

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

**Back - Interior**

Natté 380 - WOW white (092092)

**Visual properties**

<b>Tv = Visual light transmittance</b>	26.30%
<b>Tuv = UV transmittance</b>	17.50%

**Solar energetic properties**

<b>As = Solar absorptance</b>	7.90%
<b>Rs = Solar reflectance</b>	63.60%
<b>Ts = Solar transmittance</b>	28.50%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.37	0.25	0.12	0.44
<b>Glazing B</b>	0.38	0.22	0.17	0.51
<b>Glazing C</b>	0.37	0.17	0.20	0.62
<b>Glazing D</b>	0.25	0.10	0.15	0.79

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 3	Good effect
<b>Glare control</b>	Class 0	Very little effect
<b>Privacy night</b>	Class 1	Little effect
<b>Visual contact with the outside</b>	Class 1	Little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 1	Class 1	Class 1	Class 2

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

**Front - Exterior**

Natté 380 - WOW white (092092)

**Visual properties**

<b>Tv = Visual light transmittance</b>	26.30%
<b>Tuv = UV transmittance</b>	17.50%

**Solar energetic properties**

<b>As = Solar absorptance</b>	7.90%
<b>Rs = Solar reflectance</b>	63.60%
<b>Ts = Solar transmittance</b>	28.50%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.27	0.25	0.02	0.32
<b>Glazing B</b>	0.24	0.22	0.03	0.32
<b>Glazing C</b>	0.19	0.17	0.02	0.32
<b>Glazing D</b>	0.12	0.09	0.03	0.39

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 3	Good effect
<b>Glare control</b>	Class 0	Very little effect
<b>Privacy night</b>	Class 1	Little effect
<b>Visual contact with the outside</b>	Class 1	Little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 2	Class 2	Class 3

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

**Back - Exterior**

Natté 380 - WOW white (092092)

**Visual properties**

<b>Tv = Visual light transmittance</b>	26.30%
<b>Tuv = UV transmittance</b>	17.50%

**Solar energetic properties**

<b>As = Solar absorptance</b>	7.90%
<b>Rs = Solar reflectance</b>	63.60%
<b>Ts = Solar transmittance</b>	28.50%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.27	0.25	0.02	0.32
<b>Glazing B</b>	0.24	0.22	0.03	0.32
<b>Glazing C</b>	0.19	0.17	0.02	0.32
<b>Glazing D</b>	0.12	0.09	0.03	0.39

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 3	Good effect
<b>Glare control</b>	Class 0	Very little effect
<b>Privacy night</b>	Class 1	Little effect
<b>Visual contact with the outside</b>	Class 1	Little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 2	Class 2	Class 3

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect