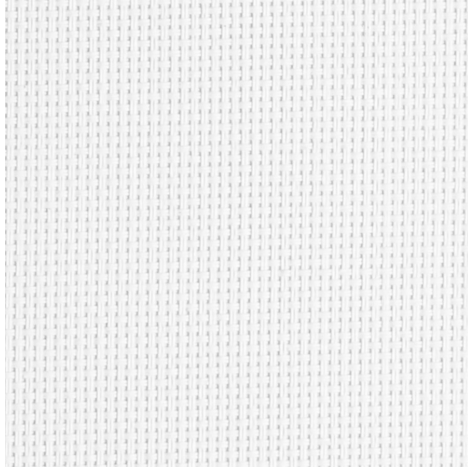
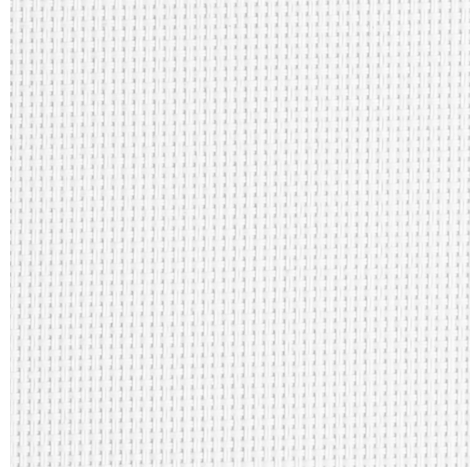


Natté 420 - WOW white (092092)
Technical info
FRONT

BACK


Widths		250 cm
Composition		Glasfaser 36% - PVC 64%
Openness factor	NBN EN 410	1.00%
Weight	NF EN 12127	420.00 g/m ²
Thickness	ISO 5084	0.54 mm
Density	ISO 7211/2	WARP 25.00 yarn/cm WEFT 18.00 yarn/cm
Color fastness to artificial light	ISO 105 B02	>7
Roll length		30 m
Cleaning		Mit Seifenwasser
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3,d0
└ France	NF P92-503	M2
└ Italy	UNI 9177	Class 1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Natté 420 - WOW white (092092)
Technical info

Tear strength	ISO 4674-1 methode 2		
↳ Original		WARP 5.13 daN	WEFT 3.30 daN
↳ After climatic chamber -30°C		WARP 5.19 daN	WEFT 3.44 daN
↳ After climatic chamber +70°C		WARP 5.47 daN	WEFT 3.59 daN
Elongation up to break	ISO 1421		
↳ Original		WARP 6.71 %	WEFT 4.46 %
↳ After color fastness to artificial light		WARP 6.65 %	WEFT 4.35 %
↳ After climatic chamber -30°C		WARP 6.93 %	WEFT 4.02 %
↳ After climatic chamber +70°C		WARP 6.66 %	WEFT 3.75 %
Breaking strength	ISO 1421		
↳ Original		WARP 244.10 daN/5cm	WEFT 190.90 daN/5cm
↳ After color fastness to artificial light		WARP 253.80 daN/5cm	WEFT 180.00 daN/5cm
↳ After climatic chamber -30°C		WARP 266.80 daN/5cm	WEFT 175.80 daN/5cm
↳ After climatic chamber +70°C		WARP 244.50 daN/5cm	WEFT 162.60 daN/5cm

Front - Interior

Natté 420 - WOW white (092092)

Visual properties

Tv = Visual light transmittance	21.10%
Tuv = UV transmittance	11.80%

Solar energetic properties

As = Solar absorptance	8.50%
Rs = Solar reflectance	68.20%
Ts = Solar transmittance	23.30%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.34	0.20	0.14	0.40
Glazing B	0.36	0.18	0.18	0.47
Glazing C	0.35	0.14	0.21	0.59
Glazing D	0.25	0.08	0.16	0.78

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 1	Class 2	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 1	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Natté 420 - WOW white (092092)

Visual properties

Tv = Visual light transmittance	21.10%
Tuv = UV transmittance	11.80%

Solar energetic properties

As = Solar absorptance	8.50%
Rs = Solar reflectance	68.20%
Ts = Solar transmittance	23.30%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.34	0.20	0.14	0.40
Glazing B	0.36	0.18	0.18	0.47
Glazing C	0.35	0.14	0.21	0.59
Glazing D	0.25	0.08	0.16	0.78

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 1	Class 2	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 1	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Front - Exterior

Natté 420 - WOW white (092092)

Visual properties

Tv = Visual light transmittance	21.10%
Tuv = UV transmittance	11.80%

Solar energetic properties

As = Solar absorptance	8.50%
Rs = Solar reflectance	68.20%
Ts = Solar transmittance	23.30%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.22	0.20	0.02	0.26
Glazing B	0.20	0.18	0.02	0.27
Glazing C	0.16	0.14	0.01	0.27
Glazing D	0.10	0.08	0.02	0.32

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 3

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Exterior

Natté 420 - WOW white (092092)

Visual properties

Tv = Visual light transmittance	21.10%
Tuv = UV transmittance	11.80%

Solar energetic properties

As = Solar absorptance	8.50%
Rs = Solar reflectance	68.20%
Ts = Solar transmittance	23.30%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.22	0.20	0.02	0.26
Glazing B	0.20	0.18	0.02	0.27
Glazing C	0.16	0.14	0.01	0.27
Glazing D	0.10	0.08	0.02	0.32

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 2	Moderate effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 3

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 4	Class 4	Class 4	Class 4

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect