


**Verso 3 (end 31.12.2024) - white | white**  
(002002)

Technical info

**FRONT**

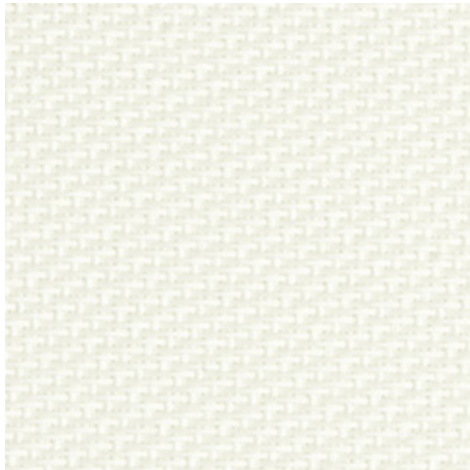

**BACK**



<b>Widths</b>		160 cm   250 cm   320 cm
<b>Composition</b>		Fibreglass 36% - PVC 64%
<b>Openness factor</b>	NBN EN 410	3.00%
<b>Weight</b>	NF EN 12127	470.00 g/m <sup>2</sup>
<b>Thickness</b>	ISO 5084	0.55 mm
<b>Density</b>	ISO 7211/2	WARP 24.00 yarn/cm      WEFT 23.00 yarn/cm
<b>Color fastness to artificial light</b>	ISO 105 B02	>7
<b>Roll length</b>		30 m
<b>Cleaning</b>		With soapy water
<b>Confection</b>		By heat, high frequency or ultrasonic welding
<b>Fire classification</b>		
└ Europe	UNE-EN 13501-1:2007	B-s2,d0
└ Germany	DIN 4102	B2

**Verso 3 (end 31.12.2024) - white | white**  
(002002)

Technical info

<b>Tear strength</b>	ISO 4674-1 methode 2		
↳ Original		WARP 5.90 daN	WEFT 4.60 daN
↳ After climatic chamber -30°C		WARP 6.30 daN	WEFT 5.50 daN
↳ After climatic chamber +70°C		WARP 6.00 daN	WEFT 4.70 daN
<b>Elongation up to break</b>	ISO 1421		
↳ Original		WARP 2.70 %	WEFT 3.60 %
↳ After color fastness to artificial light		WARP 2.90 %	WEFT 3.30 %
↳ After climatic chamber -30°C		WARP 2.75 %	WEFT 2.40 %
↳ After climatic chamber +70°C		WARP 2.30 %	WEFT 2.35 %
<b>Breaking strength</b>	ISO 1421		
↳ Original		WARP 155.00 daN/5cm	WEFT 180.00 daN/5cm
↳ After color fastness to artificial light		WARP 160.00 daN/5cm	WEFT 170.00 daN/5cm
↳ After climatic chamber -30°C		WARP 150.00 daN/5cm	WEFT 110.00 daN/5cm
↳ After climatic chamber +70°C		WARP 100.00 daN/5cm	WEFT 100.00 daN/5cm

**Front - Interior**

 Verso 3 (end 31.12.2024) - white | white  
(002002)

**Visual properties**

<b>Tv = Visual light transmittance</b>	20.10%
<b>Tuv = UV transmittance</b>	3.00%

**Solar energetic properties**

<b>As = Solar absorptance</b>	13.40%
<b>Rs = Solar reflectance</b>	65.80%
<b>Ts = Solar transmittance</b>	20.80%

**Fabric + glazing: G-factor**

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.36	0.18	0.17	0.42
<b>Glazing B</b>	0.37	0.16	0.21	0.49
<b>Glazing C</b>	0.36	0.12	0.23	0.61
<b>Glazing D</b>	0.25	0.07	0.18	0.78

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

**Visual comfort**

<b>Normal solar transmittance</b>	Class 4	Very good effect
<b>Glare control</b>	Class 1	Little effect
<b>Privacy night</b>	Class 2	Moderate effect
<b>Visual contact with the outside</b>	Class 0	Very little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

**Thermal comfort G-factor = Total solar energy transmittance**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 1	Class 1	Class 1	Class 2

**Thermal comfort Qi-factor = Secondary heat transfer factor**

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 1	Class 1	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

## Back - Interior

Verso 3 (end 31.12.2024) - white | white  
(002002)

### Visual properties

<b>Tv = Visual light transmittance</b>	20.10%
<b>Tuv = UV transmittance</b>	3.00%

### Solar energetic properties

<b>As = Solar absorptance</b>	13.00%
<b>Rs = Solar reflectance</b>	66.20%
<b>Ts = Solar transmittance</b>	20.80%

### Fabric + glazing: G-factor

	<b>G</b>	<b>Te</b>	<b>Qi</b>	<b>SC</b>
<b>Glazing A</b>	0.35	0.18	0.17	0.42
<b>Glazing B</b>	0.37	0.16	0.21	0.49
<b>Glazing C</b>	0.36	0.12	0.23	0.60
<b>Glazing D</b>	0.25	0.08	0.18	0.78

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

### Visual comfort

<b>Normal solar transmittance</b>	Class 4	Very good effect
<b>Glare control</b>	Class 1	Little effect
<b>Privacy night</b>	Class 2	Moderate effect
<b>Visual contact with the outside</b>	Class 0	Very little effect
<b>Daylight utilisation</b>	Class 2	Moderate effect

### Thermal comfort G-factor = Total solar energy transmittance

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 1	Class 1	Class 1	Class 2

### Thermal comfort Qi-factor = Secondary heat transfer factor

<b>Glazing A</b>	<b>Glazing B</b>	<b>Glazing C</b>	<b>Glazing D</b>
Class 2	Class 1	Class 1	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect