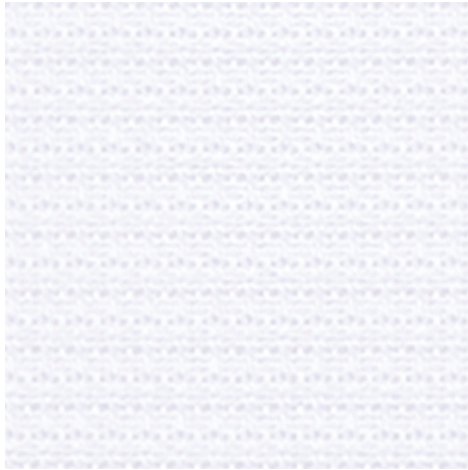
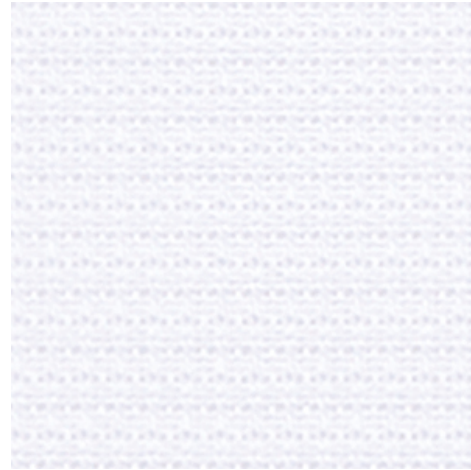


Ulterio - white (002002)
Technical info
FRONT

BACK


Widths		250 cm 320 cm
Composition		100% Recycled PET bottles
Openness factor	NBN EN 410	3.00%
Weight	NF EN 12127	215.00 g/m ²
Thickness	ISO 5084	0.60 mm
Density	ISO 7211/2	WARP 21.00 yarn/cm WEFT 18.00 yarn/cm
Color fastness to artificial light	ISO 105 B02	> 7
Roll length		30 m
Cleaning		With soapy water
Confection		By heat, high frequency or ultrasonic welding
Fire classification		
└ Europe	UNE-EN 13501-1:2007	C-s3, d0
└ France	NF P92-503	M1
└ Italy	UNI 9177	Class 1
└ Germany	DIN 4102	B1
└ UK	BS 5867	C
└ USA	NFPA 701	FR

Ulterio - white (002002)		Technical info	
Tear strength	ISO 4674-1 methode 2		
└ Original		WARP 5.20 daN	WEFT 6.80 daN
└ After climatic chamber -30°C		WARP 5.00 daN	WEFT 6.20 daN
└ After climatic chamber +70°C		WARP 5.20 daN	WEFT 6.70 daN
Elongation up to break	ISO 1421		
└ Original		WARP 36.00 %	WEFT 33.50 %
Breaking strength	ISO 1421		
└ Original		WARP 160.00 daN/5cm	WEFT 135.00 daN/5cm

Front - Interior

Ulterio - white (002002)

Visual properties

Tv = Visual light transmittance	33.10%
Tuv = UV transmittance	35.50%

Solar energetic properties

As = Solar absorptance	5.40%
Rs = Solar reflectance	60.40%
Ts = Solar transmittance	34.20%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.41	0.00	0.11	0.48
Glazing B	0.41	0.26	0.15	0.54
Glazing C	0.38	0.20	0.18	0.64
Glazing D	0.26	0.12	0.14	0.80

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 3	Good effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect

Back - Interior

Ulterio - white (002002)

Visual properties

Tv = Visual light transmittance	33.10%
Tuv = UV transmittance	35.50%

Solar energetic properties

As = Solar absorptance	5.40%
Rs = Solar reflectance	60.40%
Ts = Solar transmittance	34.20%

Fabric + glazing: G-factor

	G	Te	Qi	SC
Glazing A	0.41	0.30	0.11	0.48
Glazing B	0.41	0.26	0.15	0.54
Glazing C	0.38	0.20	0.18	0.64
Glazing D	0.26	0.12	0.14	0.80

G = Total solar energy transmittance / Te = Direct solar transmittance / Qi = Secondary heat transfer factor / SC = Shading coefficient

Visual comfort

Normal solar transmittance	Class 4	Very good effect
Glare control	Class 1	Little effect
Privacy night	Class 2	Moderate effect
Visual contact with the outside	Class 0	Very little effect
Daylight utilisation	Class 3	Good effect

Thermal comfort G-factor = Total solar energy transmittance

Glazing A	Glazing B	Glazing C	Glazing D
Class 1	Class 1	Class 1	Class 2

Thermal comfort Qi-factor = Secondary heat transfer factor

Glazing A	Glazing B	Glazing C	Glazing D
Class 2	Class 2	Class 2	Class 2

Class 0 = Very little effect / 1 = Little effect / 2 = Moderate effect / 3 = Good effect / 4 = Very good effect