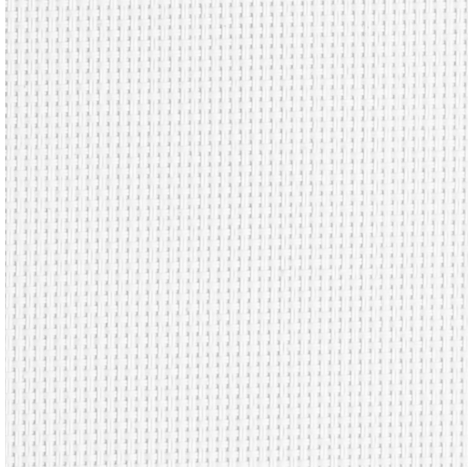
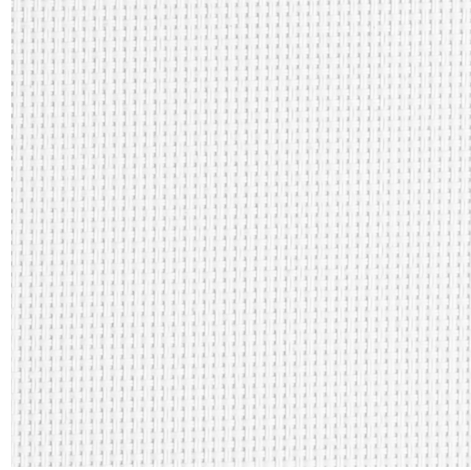


Natté 300 - WOW white (092092)
Technical info
FRONT

BACK


| | | |
|---|---------------------|---|
| Widths | | 250 cm |
| Composition | | Fibreglass 36% - PVC 64% |
| Openness factor | NBN EN 410 | 10.00% |
| Weight | NF EN 12127 | 330.00 g/m ² |
| Thickness | ISO 5084 | 0.30 mm |
| Density | ISO 7211/2 | WARP 18.00 yarn/cm WEFT 18.00 yarn/cm |
| Color fastness to artificial light | ISO 105 B02 | >7 |
| Roll length | | 30 m |
| Cleaning | | With soapy water |
| Confection | | By heat, high frequency or ultrasonic welding |
| Fire classification | | |
| └ Europe | UNE-EN 13501-1:2007 | awaiting results |
| └ France | NF P92-503 | M2 |
| └ Italy | UNI 9177 | Class 1 |
| └ Germany | DIN 4102 | B2 |
| └ UK | BS 5867 | C |
| └ USA | NFPA 701 | FR |

| Natté 300 - WOW white (092092) | | Technical info | |
|--|----------------------|---------------------|---------------------|
| Tear strength | ISO 4674-1 methode 2 | | |
| ↳ Original | | WARP 4.70 daN | WEFT 4.90 daN |
| ↳ After climatic chamber -30°C | | WARP 4.80 daN | WEFT 4.90 daN |
| ↳ After climatic chamber +70°C | | WARP 4.80 daN | WEFT 4.90 daN |
| Elongation up to break | ISO 1421 | | |
| ↳ Original | | WARP 2.70 % | WEFT 2.70 % |
| ↳ After color fastness to artificial light | | WARP 3.10 % | WEFT 3.20 % |
| ↳ After climatic chamber -30°C | | WARP 3.10 % | WEFT 2.70 % |
| ↳ After climatic chamber +70°C | | WARP 2.70 % | WEFT 2.70 % |
| Breaking strength | ISO 1421 | | |
| ↳ Original | | WARP 140.00 daN/5cm | WEFT 140.00 daN/5cm |
| ↳ After color fastness to artificial light | | WARP 140.00 daN/5cm | WEFT 140.00 daN/5cm |
| ↳ After climatic chamber -30°C | | WARP 135.00 daN/5cm | WEFT 130.00 daN/5cm |
| ↳ After climatic chamber +70°C | | WARP 100.00 daN/5cm | WEFT 120.00 daN/5cm |